



CDB2501-DC-SD-REV-A

DEVICE: CS2501


Board ID EEPROM

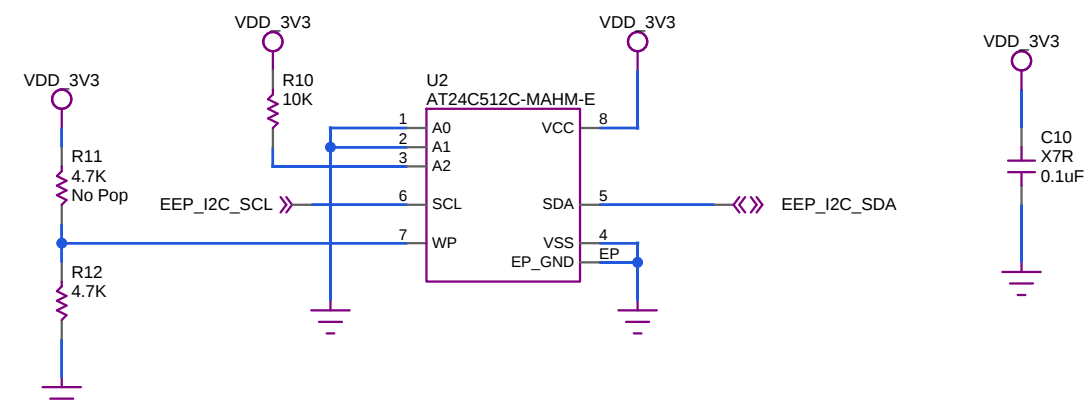

Alt Xtal options

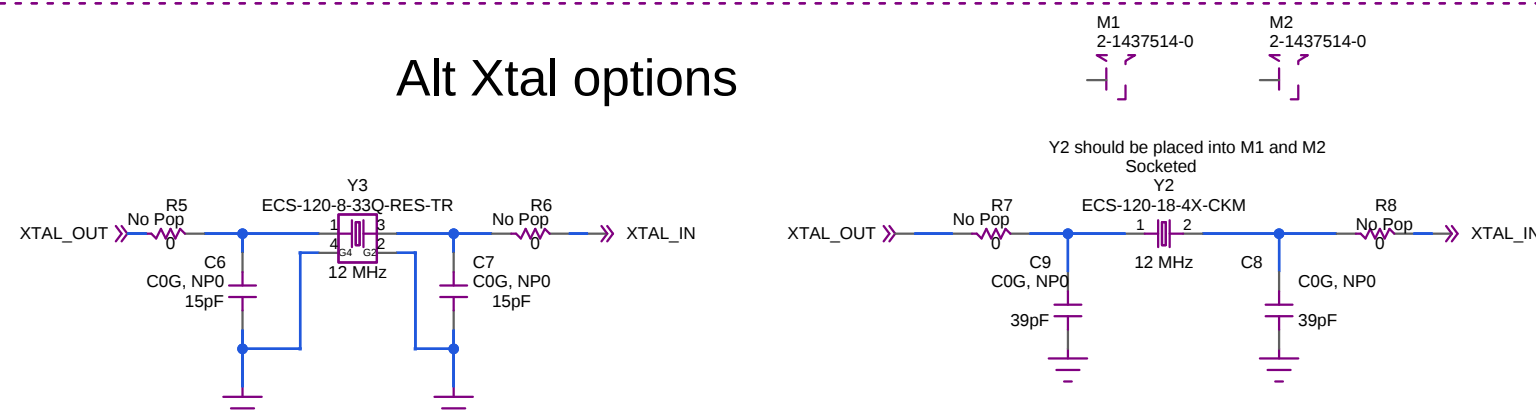


CS2501

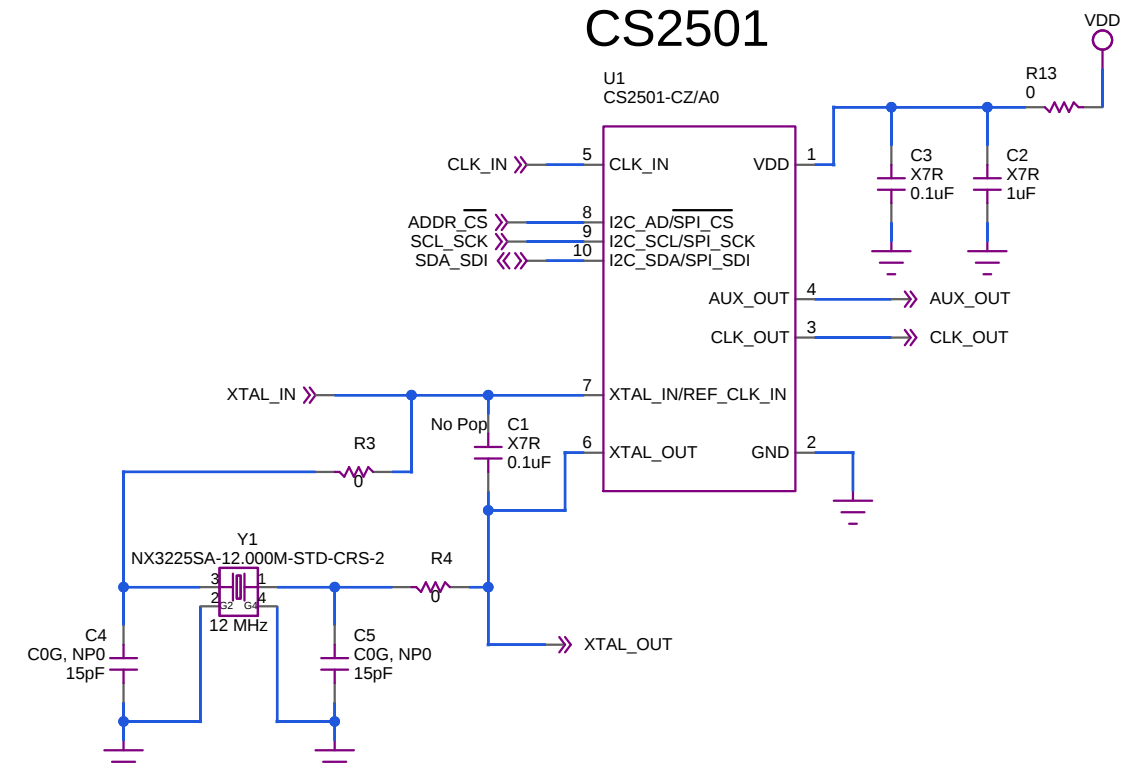


C1 is supported for legacy PCB designs with CS2300

To select internal LCO of CS2501: Move jumpers P1 and P2 across 2-4
P1 and P2 can be used as test points when XTAL or REF_CLK is used

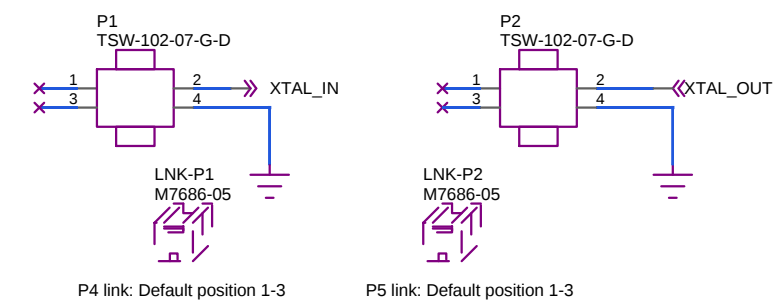


Pop R9 and unpop R3, R4 for external REF_CLK




Test points


Input Clocks

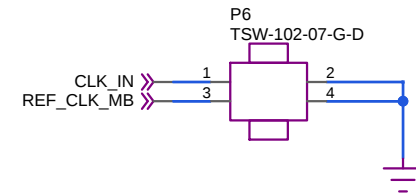


Output Clocks

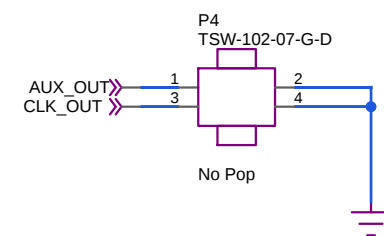

VDD supply



SPI/I2C

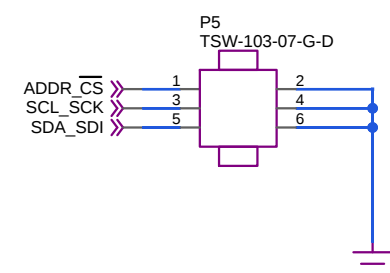

Connectors to/from mother board

